




# ALL-PURPOSE

## ANTI-SEIZE

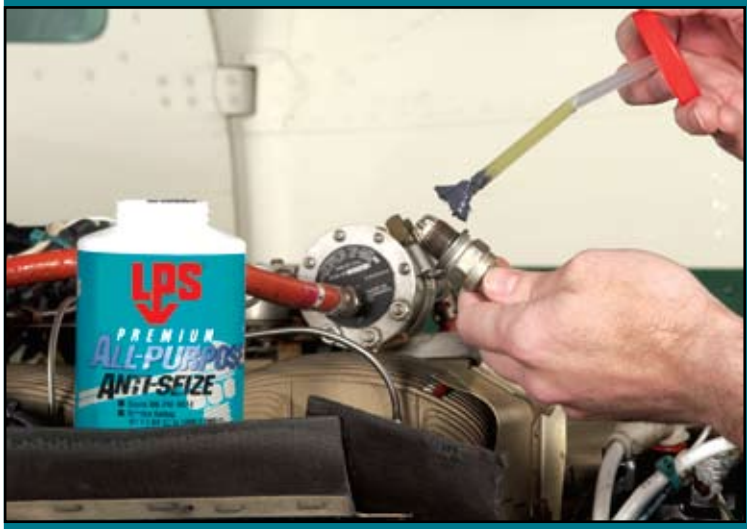

### FEATURES

- Prevents seizure up to 1800°F (982°C)
- Lead free and moly fortified
- Protects against seizure, heat-freeze, galling, rust and corrosion
- Lowers friction; reduces wrench torque
- Reduces maintenance costs
- Not affected by contraction, expansion or vibration
- Will not run, drip or settle out
- Steel blue color

Conforms to: MIL-PRF-907E

### PACKAGES

#### Net Fill

- 1/2 lb. (227 grams) paste
- 1 lb. (454 grams) paste

#### Part No.

- 04108
- 04110



### APPLICATIONS

- Fittings
- Flange Faces
- Gaskets
- Guides
- Keys
- Keyways
- Slides
- Tubular Threads

### PROPERTIES

Color/Appearance:  
Blue/Gray Smooth Paste

Dropping Point (ASTM D-566):  
450°F (232°C)

Flash Point (ASTM D-92):  
> 430°F (221°C)

Oil Separation, Wt. % Loss  
@ 212°F (100°C):  
<5.0

Penetration @ 77°F ASTM D-217:  
285-315

Salt Fog Resistance (ASTM B-117)  
20%NaCl @ 100°F (38°C)  
Hrs. Free of Corrosion:  
200 +

Shell 4-Ball (ASTM D-2596)  
Weld Point kgf:  
500

Specific Gravity (Water = 1):  
1.0-1.2 @ 68°F (20°C)

Coefficient of Friction:  
0.08

MATERIAL SAFETY DATA SHEETS AVAILABLE UPON REQUEST OR VISIT OUR WEB SITE :WWW.LPSLABS.COM

**LPS Laboratories** • An Illinois Tool Works Company

P.O. Box 105052 • 4647 Hugh Howell Road • Tucker, GA 30085-5052 • TEL: (800) 241-8334 or (770) 243-8800 • FAX: (800) 543-1563 or (770) 243-8899

**Internet Web Site: [www.lpslabs.com](http://www.lpslabs.com)**

©2009 LPS Laboratories • LPS® is a registered trademark of Illinois Tool Works • Printed in U.S.A. • All Rights Reserved • Form #2111 • Rev. 6/2009