



DRY FILM

SILICONE LUBRICANT



FEATURES

- Provides excellent lubrication
- Ideal for releasing molded parts
- Excellent for high temperature applications up to 500°F (260°C)
- Colorless, thin film
- Dry film will not attract dust or dirt
- Non-flammable
- Does not contain chlorinated solvents
- Excellent mold release


PACKAGE

Net Fill
12 oz. (340 grams) aerosol

Part No.
01616

APPLICATIONS

- Compression Molding
- Conveyors
- Doors
- Injection Molding
- Plastic Gears
- Rubber Components
- Slides
- Sliding Wood Surfaces
- Windows

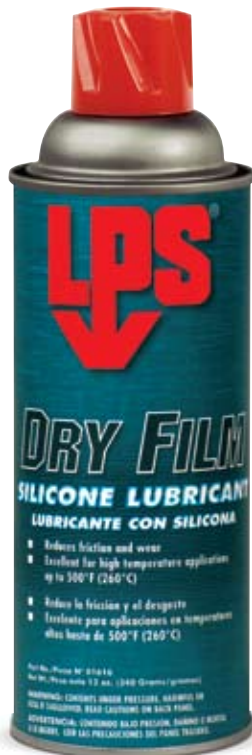

PROPERTIES

Appearance/Physical State:

Clear/Liquid

Evaporation Rate:

<1 (Ethyl Ether=1)

Flash Point (COC):

< 0°F (-18°C)

HMIS:

1, 3, 0

Specific Gravity (water=1):

0.74 – 0.76 @ 20°C

Vapor Density:

~ 3.0

Vapor Pressure:

630 kPa (25°C)

VOC Content:

50%, 375 g/l

MATERIAL SAFETY DATA SHEETS AVAILABLE UPON REQUEST OR VISIT OUR WEB SITE : WWW.LPSLABS.COM

LPS Laboratories • An Illinois Tool Works Company

P.O. Box 105052 • 4647 Hugh Howell Road • Tucker, GA 30085-5052 • TEL: (800) 241-8334 or (770) 243-8800 • FAX: (800) 543-1563 or (770) 243-8899

Internet Web Site: www.lpslabs.com

©2009 LPS Laboratories • LPS® is a registered trademark of Illinois Tool Works • Printed in U.S.A. • All Rights Reserved • Form #2162 • Rev. 9/2009