


LPS[®] TKX[®]

ALL-PURPOSE LUBRICANT

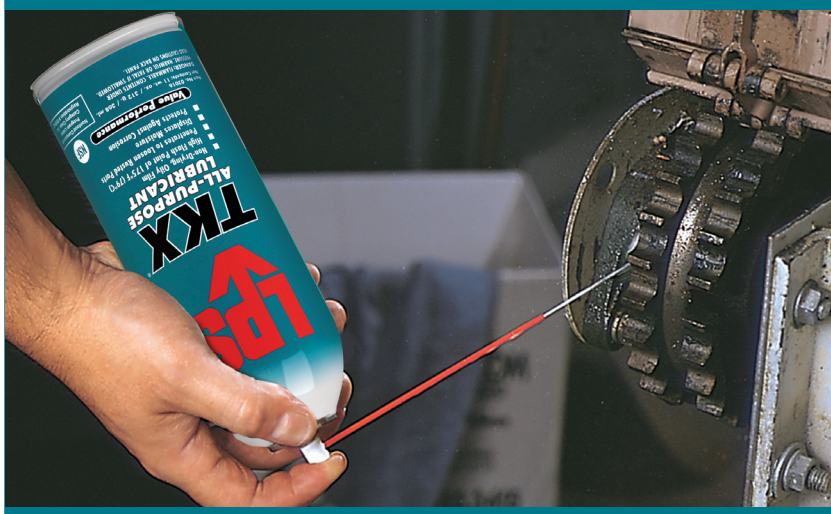

Nonfood Compounds Program Listed
Category Code: H2 Registration
059842 (aerosol), # 059843 (bulk)

APPLICATIONS

- Bearings
- Cables and Chains
- Castings
- Dies and Molds
- Forgings
- Gears
- Machined Stock
- Machinery
- Nuts and Bolts
- Pumps
- Pulleys
- Saw Blades
- Springs
- Stalled Engines
- Ways and Guides
- Wheels



Value Performance

FEATURES

- Displaces moisture
- Provides a non-drying, long lasting, oily film
- High flash point of 175°F (79°C)
- Does not contain chlorinated solvents or silicones
- Non-conductive
- Safe on most surfaces
- NSF[®] certified category code: H2 Registration #059842 (aerosol), #059843 (bulk)
- Inverta Spray Valve lets you spray in an upright or inverted position
- NEW - Environmentally friendly aerosol can contains greater than 50% recycled steel

PACKAGES

Net Contents	Part No.
11 wt. oz. / 312 g. / 368 mL aerosol	02016
20 fl. oz. (591 mL) trigger spray	02022
1 gal. (3.78 L) container	02028
5 gal. (18.93 L) pail	02005
55 gal. (208 L) drum	02055

PROPERTIES

Appearance/Physical State:

Dark green-colored liquid

Dielectric Strength (ASTM D-877):

32,000 volts

Flash Point (TCC):

175°F (79°C) ± 10°F (6°C)

HMIS:

1, 2, 0

Pour Point:

- 50°F (- 46°C)

Propellant:

Carbon Dioxide

Specific Gravity (water=1):

0.83 - 0.85 @ 68°F (20°C)

Typical Dried Film Thickness:

5 microns

VOC Content:

2.5%, 21 g/L, 0.2 lb./gal. (aerosol)

MATERIAL SAFETY DATA SHEETS AVAILABLE UPON REQUEST OR VISIT OUR WEBSITE: WWW.LPSLABS.COM

LPS Laboratories • An Illinois Tool Works Company

P.O. Box 105052 • 4647 Hugh Howell Road • Tucker, GA 30085-5052 • TEL: (800) 241-8334 or (770) 243-8800 • FAX: (800) 543-1563 or (770) 243-8899

Internet Website: www.lpslabs.com

©2011 LPS Laboratories • LPS[®] and TKX[®] are registered trademarks of Illinois Tool Works • Printed in U.S.A. • All Rights Reserved • Form #2115 • Rev. 1/2011